


RIVET NUTS



flat head, round body.
 material: steel ,stainless steel, aluminium,brass.
 Type:HX76 2 open end type ,HX76F 2 closed end type.

Advantages:
 Very small head
 Open end lets thread go all the way through
 Closed end prevents moisture, dust etc

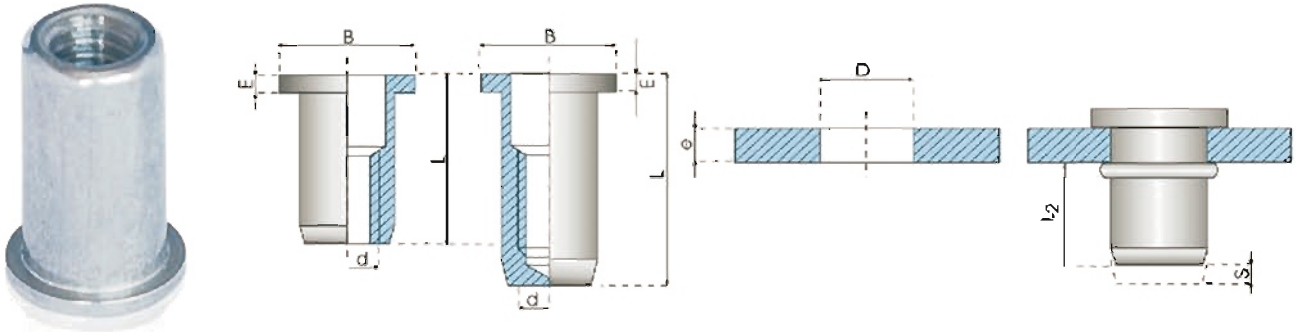

d	grip range e	hole diameter D ± 0.1/0	B	E	S*	open end			closed end		
						L	L2*	Code No.	L	L2*	Code No.
M3	0.5-1.0	5	7.5	1.0	S=2.8-e	8.5	4.8	HX76 203 010	12.5	8.8	HX76F 203 010
	1.0-1.5	5	7.5	1.0	S=3.3-e	9.0	4.8	HX76 203 015	13.0	8.8	HX76F 203 015
	1.5-3.0	5	7.5	1.0	S=4.8-e	10.0	4.8	HX76 203 030	14.0	8.8	HX76F 203 030
	3.0-4.5	5	7.5	1.0	S=6.3-e	11.5	4.8	HX76 203 045	15.5	8.8	HX76F 203 045
	4.5-6.0	5	7.5	1.0	S=7.8-e	13.0	4.8	HX76 203 060	17.0	8.8	HX76F 203 060
M4	0.5-1.0	6	9.0	1.0	S=2.6-e	10.0	5.4	HX76 204 010	15.0	10.4	HX76F 204 010
	1.0-2.0	6	9.0	1.0	S=3.6-e	10.5	5.4	HX76 204 020	15.5	10.4	HX76F 204 020
	2.0-4.0	6	9.0	1.0	S=5.6-e	12.0	5.4	HX76 204 040	17.0	10.4	HX76F 204 040
	4.0-6.0	6	9.0	1.0	S=7.6-e	14.0	5.4	HX76 204 060	19.0	10.4	HX76F 204 060
M5	0.5-3.0	7	10.0	1.0	S=5.0-e	14.0	8.0	HX76 205 030	20.0	14.0	HX76F 205 030
	3.0-5.5	7	10.0	1.0	S=7.5-e	17.0	8.0	HX76 205 055	23.0	14.0	HX76F 205 055
	5.5-8.0	7	10.0	1.0	S=10.0-e	20.0	8.0	HX76 205 080	26.0	14.0	HX76F 205 080
M6	0.5-3.0	9	13.0	1.5	S=5.2-e	16.0	10.0	HX76 206 030	23.0	17.0	HX76F 206 030
	3.0-5.5	9	13.0	1.5	S=7.7-e	19.0	10.0	HX76 206 055	26.0	17.0	HX76F 206 055
	5.5-8.0	9	13.0	1.5	S=10.2-e	22.0	10.0	HX76 206 080	29.0	17.0	HX76F 206 080
M8	0.5-3.0	11	16.0	1.5	S=5.7-e	18.0	11.0	HX76 208 030	26.0	19.0	HX76F 208 030
	3.0-5.5	11	16.0	1.5	S=8.2-e	21.0	11.0	HX76 208 055	29.0	19.0	HX76F 208 055
	5.5-8.0	11	16.0	1.5	S=10.7-e	24.0	11.0	HX76 208 080	32.0	19.0	HX76F 208 080
	8.0-10.5	11	16.0	1.5	S=13.2-e	27.0	11.0	HX76 208 105	35.0	19.0	HX76F 208 105
M10	1.0-3.5	13	19.0	2.0	S=6.5-e	23.0	15.0	HX76 210 035	33.0	25.0	HX76F 210 035
	3.5-6.0	13	19.0	2.0	S=9.0-e	26.0	15.0	HX76 210 060	36.0	25.0	HX76F 210 060
	6.0-8.5	13	19.0	2.0	S=11.5-e	29.0	15.0	HX76 210 085	39.0	25.0	HX76F 210 085
	8.5-11.0	13	19.0	2.0	S=14-e	32.0	15.0	HX76 210 110	42.0	25.0	HX76F 210 110
	1.0-3.5	13	15.8	1.7	S=7.0-e	19.0	11.0	HX76 210 035	/	/	/
M12	1.0-4.0	16	23.0	2.0	S=7.7-e	27.0	17.5	HX76 212 040	39.0	29.5	HX76F 212 040
	4.0-7.0	16	23.0	2.0	S=10.7-e	30.0	17.5	HX76 212 070	42.0	29.5	HX76F 212 070
	7.0-10.0	16	23.0	2.0	S=13.7-e	33.0	17.5	HX76 212 100	45.0	29.5	HX76F 212 100