


RIVET NUTS



knurled body ,flat head.
 material: steel ,stainless steel, aluminium,brass.
 Type:HX76 1 open end type ,HX76F 1 closed end type.

Advantages:
 Very small head
 Open end lets thread go all the way through
 Closed end prevents moisture, dust etc

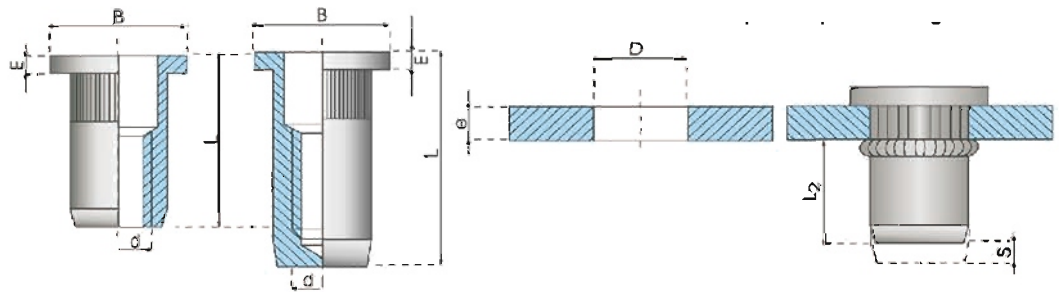

d	grip range e	hole diameter D±0.1/0	B	E	S*	open end			closed end		
						L	L2*	Code No	L	L2*	Code No
M3	0.75-1.00	5	7	1.0	S=2.2-e	8.8	6.0	HX76 103 100	13.1	10.3	HX76F 103 100
	1.00-1.75	5	7	1.0	S=3.0-e	9.6	6.0	HX76 103 175	13.9	10.3	HX76F 103 175
	1.75-2.50	5	7	1.0	S=3.7-e	10.4	6.0	HX76 103 250	14.7	10.3	HX76F 103 250
	2.50-3.25	5	7	1.0	S=4.6-e	11.2	6.0	HX76 103 325	15.5	10.3	HX76F 103 325
M4	0.75-1.00	6	8	1.0	S=2.2-e	9.2	6.3	HX76 104 100	14.2	11.3	HX76F 104 100
	1.00-1.75	6	8	1.0	S=3.0-e	10.0	6.3	HX76 104 175	15.0	11.3	HX76F 104 175
	1.75-2.50	6	8	1.0	S=3.7-e	10.8	6.3	HX76 104 250	15.8	11.3	HX76F 104 250
	2.50-3.25	6	8	1.0	S=4.6-e	11.6	6.3	HX76 104 325	16.6	11.3	HX76F 104 325
M5	0.50-1.00	7	10**	1.0	S=3.0-e	12.0	8.0	HX76 105 100	17.6	14.6	HX76F 105 100
	1.00-2.00	7	10**	1.0	S=4.0-e	13.0	8.0	HX76 105 200	18.7	14.6	HX76F 105 200
	2.00-3.00	7	10**	1.0	S=5.0-e	14.0	8.0	HX76 105 300	19.8	14.6	HX76F 105 300
	3.00-4.00	7	10**	1.0	S=6.0-e	15.0	8.0	HX76 105 400	20.9	14.6	HX76F 105 400
M6	0.70-1.50	9	13**	1.5	S=3.5-e	14.5	10.0	HX76 106 150	22.0	17.0	HX76F 106 150
	1.50-3.00	9	13**	1.5	S=5.0-e	16.0	10.0	HX76 106 300	23.6	17.0	HX76F 106 300
	3.00-4.50	9	13**	1.5	S=6.5-e	17.5	10.0	HX76 106 450	25.2	17.0	HX76F 106 450
M8	1.00-2.00	11	16**	1.5	S=5.0-e	17.0	10.8	HX76 108 200	25.0	18.8	HX76F 108 200
	2.00-3.50	11	16**	1.5	S=6.5-e	18.5	10.8	HX76 108 350	26.5	18.8	HX76F 108 350
	3.50-5.00	11	16**	1.5	S=8.0-e	20.0	10.8	HX76 108 500	28.0	18.8	HX76F 108 500
M10	1.00-1.50	13	19	2.0	S=4.5-e	20.8	15.0	HX76 110 150	30.7	24.9	HX76F 110 150
	1.50-3.00	13	19	2.0	S=6.0-e	22.4	15.0	HX76 110 300	32.3	24.9	HX76F 110 300
	3.00-4.50	13	19	2.0	S=7.5-e	24.0	15.0	HX76 110 450	33.9	24.9	HX76F 110 450
	4.50-6.00	13	19	2.0	S=9.0-e	25.6	15.0	HX76 110 600	35.5	24.9	HX76F 110 600

d	grip range e	hole diameter D±0.1	B	E	S*	L	L2*	Code No
(8-32) 5/32	0.5-1.5	6.4	7.0	0.5	S=2.8-e	9.0	5.7	HX76 115 015
(10-24) 3/16	0.5-2.5	7.0	9.0	0.8	S=2.2-e	11.0	8.0	Hx76 118 025
1/4-20	0.5-3.0	9.0	12.6	1.4	S=4.6-e	15.0	9.0	Hx76 125 030
5/16-24	0.5-3.5	11.0	15.0	1.5	S=5.0-e	18.0	11.5	Hx76 131 035
3/8-16	0.5-5.0	13.0	22.0	1.5	S=5.9-e	20.0	12.6	Hx76 137 050